




Twistflex hanger assembly includes a twistflex clamp with cushion, a 12 inch threaded rod, and hardware to attach it to the round member of the tower.

#### FEATURES / BENEFITS

Secure the twistflex on the tower to avoid vibrating and damaging.

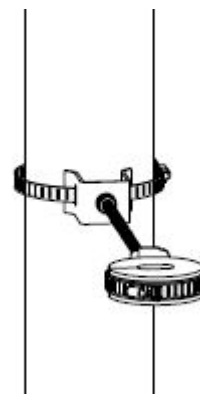

Pipe not included in the product


## Technical features

#### STRUCTURE

|                        |  |                                 |
|------------------------|--|---------------------------------|
| Product Type           |  | Hanger Assembly                 |
| Transmission Line Type |  | Twistflex                       |
| Cable Size             |  | WR90 / R100 Twistflex Waveguide |

#### MECHANICAL SPECIFICATIONS

|                       |         |                    |
|-----------------------|---------|--------------------|
| Tower Member Diameter | mm (in) | 102 - 127 (4 - 5 ) |
| Material              |         | Stainless Steel    |
| Thread                | mm (in) | 3/8"               |
| Length                | mm (in) | 305 (12)           |

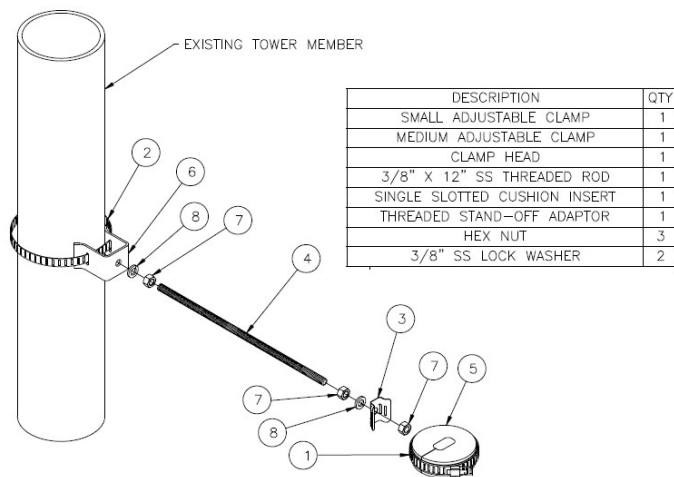

Twistflex Hanger Assembly Drawing and Parts List

#### External Document Links

#### Notes