




Rectangular Waveguide R 100 H-Bend 90 degree,
flanges CPR90G/CPR90G, $f = 8.20\text{--}12.50\text{ GHz}$,
VSWR max 1.06, $A=100\text{mm}$ (4in),
gasket and screw kit enclosure
body made out of brass or copper and flanges made out of brass

FEATURES / BENEFITS

Waveguide installation

- The rectangular waveguide component provides simple installation in particular difficult cases
- It can be installed where less space is available
- It provides outstanding electrical performance

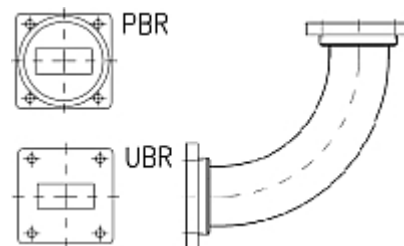

Picture only for illustration

Technical features**STRUCTURE**

Type of Rectangular Waveguide Component		Bend in H-Plane
Waveguide Size IEC (EIA)		R100 (WR90)
Flange A		CPR90G
Flange B		CPR90G
Flange Finish		Brass un-plated
Package Quantity		1

ELECTRICAL SPECIFICATIONS


Minimum Return Loss (max. VSWR)	dB (VSWR)	30.7 (1.06)
---------------------------------	-----------	-------------

MECHANICAL SPECIFICATIONS


Bend/Twist	degree	90
Length	mm (in)	100 (4)

MATERIAL

Material		Brass
Color		White

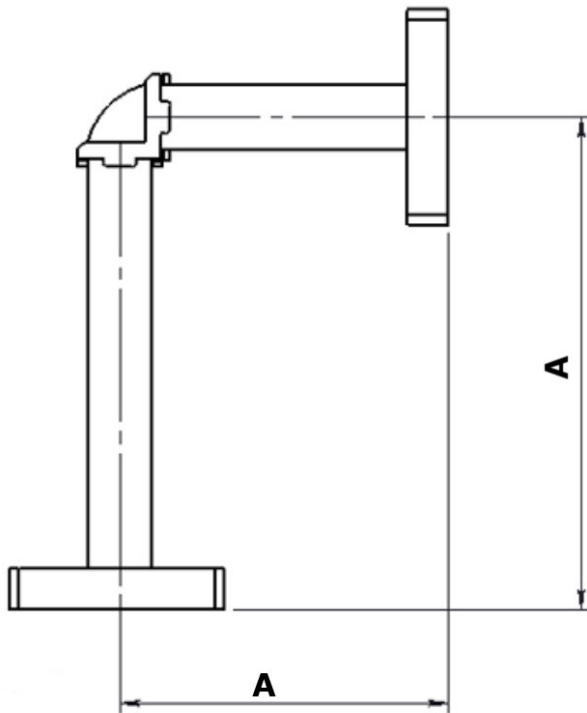

Design with casted bend

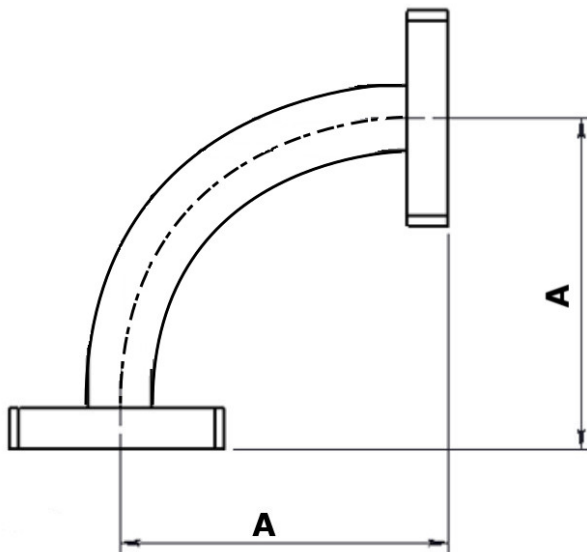

Design with arcuate waveguide bend



External Document Links

Notes