



The omnidirectional antenna I-ATO5-698/4000 is designed for broadband in-building DAS applications supporting all kind of safety as well as 4G and 5G commercial wireless communication networks. The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences. The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.

FEATURES / BENEFITS

- Wideband omnidirectional antenna supporting all wireless services in the frequency bands 698-960 / 1710-2700 / 3400-4000MHz
- Typically used in indoor distribution of 2G / 3G / 4G / 5G wireless services in all standardized frequency bands
- PIM optimized antenna design (150dBc @2x20W)
- Aesthetical visual appearance, compact and light weight
- Low loss pigtail with N-female connector
- Ideal for 4G LTE multi-band MIMO applications



I-ATO5-698/4000

Technical features**GENERAL SPECIFICATIONS**

Product Type		Omnidirectional Antenna
Techn. Application		Indoor

MECHANICAL SPECIFICATIONS

Number of Input Ports		2
Connectors		N female
Height (Less Connectors)	mm (in)	40 (1.57)
Diameter (Less Connectors)	mm (in)	218 (8.58)
Weight	kg (lb)	0.5 (1.1)

ELECTRICAL SPECIFICATIONS

Frequenz	MHz	698-960	1710-2700	3400-4000
Gain, typ.	dBi	3.5	4.5	5.0
VSWR		2.0	2.0	2.0
Beamwidth, Vertical, typ.	°	90	45	35
Impedance, Ohm	Ω	50		
Polarization		Linear x2		
Intermodulation (IM3)		-150 dBc		
Total Input Power max.	W	50		

MATERIAL

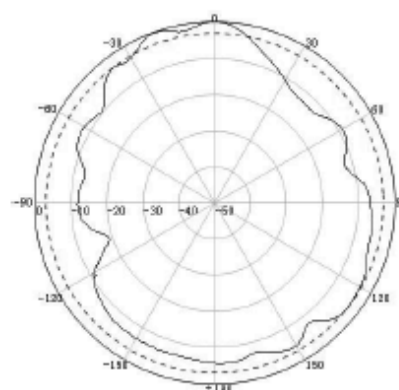
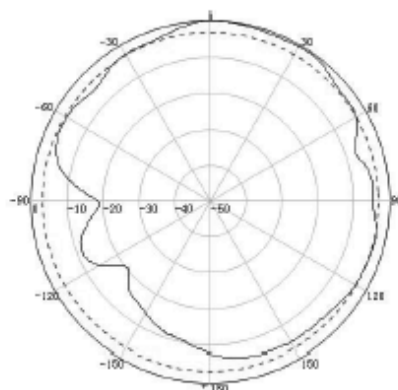
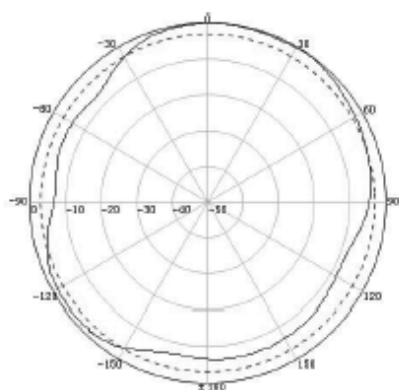
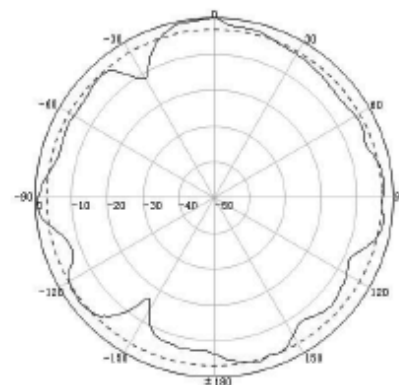
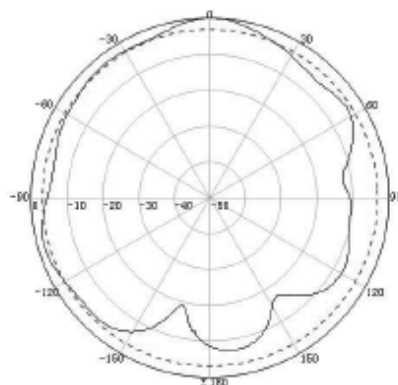
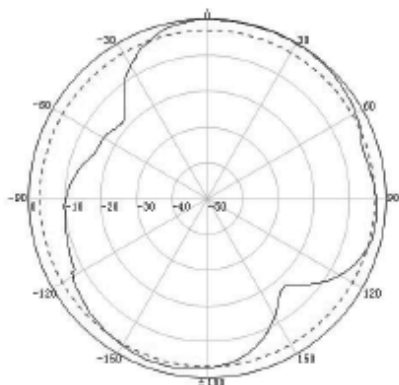
Radome Material		ABS
Radome Color		White (RAL 9003)

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-40 to 55 (-40 to 131)
-----------------------	---------	-------------------------

TESTING AND ENVIRONMENTAL

Environmental Class		Indoor
---------------------	--	--------

**Horizontal
pattern****Vertical
pattern****900MHz****1710MHz****2500MHz**[External Document Links](#)**Notes****Ceiling mounting via hole (standard)****Typical isolation between polarizations: >17dB (698-960MHz), >20dB (1710-2700MHz, 3400-4000MHz)**