



The TER Series are coaxial loads which operate from DC up to 3.8 GHz. The products are ideally suited for termination of unused ports in distributed antenna systems or in RADIAFLEX® radiating cables systems.

**FEATURES / BENEFITS**

- Ideal for all kind of DAS applications
- Finned termination for optimized heat dissipation
- Low VSWR

NO IMAGE  
AVAILABLE**Technical features****GENERAL SPECIFICATIONS**

|                    |  |        |
|--------------------|--|--------|
| Product Type       |  | Load   |
| Techn. Application |  | Indoor |

**ELECTRICAL SPECIFICATIONS**

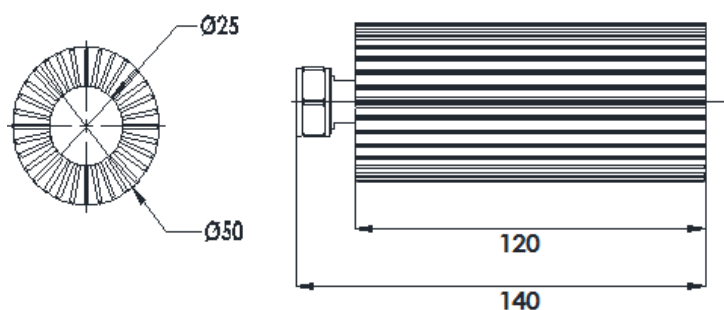
|                             |         |          |
|-----------------------------|---------|----------|
| Frequency Range             | MHz     | DC-3.800 |
| Impedance                   | Ohm     | 50       |
| Max. VSWR / Return Loss, dB | VSWR/dB | /19      |
| Total Input Power           | W       | 30       |

**MECHANICAL SPECIFICATIONS**

|                      |         |             |
|----------------------|---------|-------------|
| Input Connector Type |         | 4.3-10 male |
| Diameter             | mm (in) | 50 (1.97)   |
| Length               | mm (in) | 140 (5.5)   |

**TEMPERATURE SPECIFICATIONS**

|                     |         |                        |
|---------------------|---------|------------------------|
| Temperature Range   | °C (°F) | -25 to 65 (-13 to 149) |
| Environmental Class |         | Indoor                 |

**External Document Links****Notes**