




RFS Technologies TPS\* Tapper product family has been designed to support a variety of wireless applications in the frequency band from 694 to 3800MHz. The units couple off a defined fraction of a RF signal from typically 3 to 30 dB with minimal reflections or loss. The broad frequency range is ideally suited for 3G / 4G / 5G multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables. Notably, these products feature a low level of network interferences due to their PIM optimized desing.

#### FEATURES / BENEFITS

- Split ratio 30:1 / 15dB
- N-female interfaces
- PIM optimized design (160dBc @2x43dBm)
- Low insertion loss
- High power handling
- Small size, Low weight

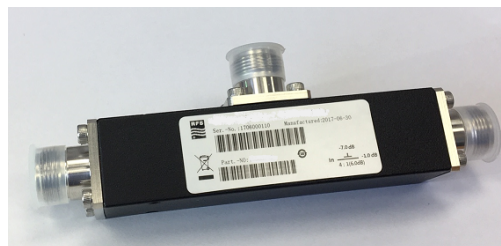

TPS15-43-694/3800 (similar product illustration)

## Technical features

#### STRUCTURE

|                        |  |                        |
|------------------------|--|------------------------|
| Product Type           |  | Unequal Divider/Tapper |
| Techn. Application     |  | Indoor                 |
| Number of Input Ports  |  | 1                      |
| Number of Output Ports |  | 2                      |

#### ELECTRICAL SPECIFICATIONS

|                         |         |                  |
|-------------------------|---------|------------------|
| Frequency Range         | MHz     | 694 - 3800       |
| Connector Type          |         | N female         |
| Max. VSWR / Return Loss | VSWR/dB | 1.30/17.7 (1.3)  |
| Insertion Loss max.     | dB      | 0.2              |
| Coupling Value          | dB      | 15.3             |
| Coupling Flatness max.  | dB      | +2.0 / -2.0      |
| Intermodulation (IM3)   |         | 160dBc (2x43dBm) |
| Impedance               | Ohm     | 50               |
| Total Input Power       | W       | 200              |

#### TEMPERATURE SPECIFICATIONS


|                   |         |                          |
|-------------------|---------|--------------------------|
| Temperature Range | °C (°F) | -25 to +65 (-13 to +149) |
|-------------------|---------|--------------------------|

#### MECHANICAL SPECIFICATIONS

|        |         |             |
|--------|---------|-------------|
| Height | mm (in) | 49.7 (1.96) |
| Width  | mm (in) | 19.5 (0.77) |
| Length | mm (in) | 84.3 (3.32) |

#### TESTING AND ENVIRONMENTAL

|                     |  |      |
|---------------------|--|------|
| Environmental Class |  | IP65 |
|---------------------|--|------|

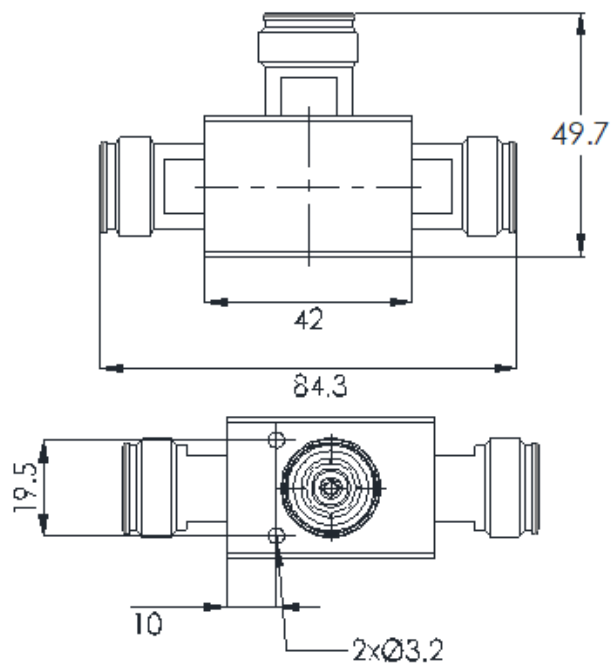

[External Document Links](#)

[Notes](#)